


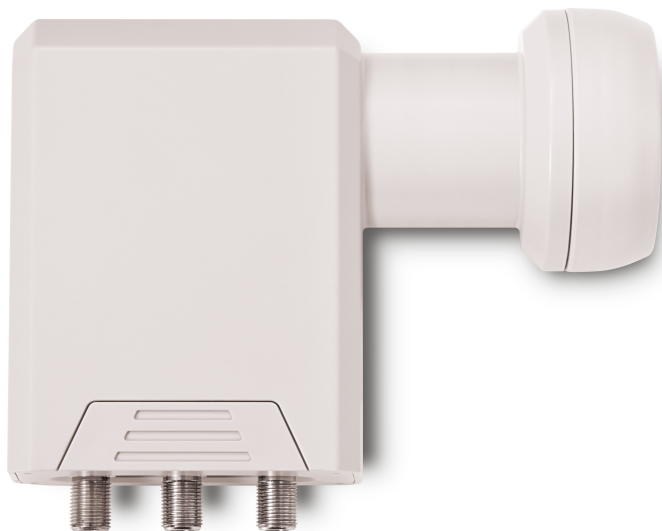

## SCR-LNB

SCR-LNB with 2 legacy outputs

| EAN           | Colour | Item no.  | Weight (Box) | Weight | Device (W x H x D) | Box                |
|---------------|--------|-----------|--------------|--------|--------------------|--------------------|
| 4019588178861 | beige  | 0017/8886 | 344 g        | 292 g  | 14,5 x 6 x 11,5 cm | 12,3 x 6,5 x 15 cm |

### TOP FEATURES

4 Receiver mit SCR-Unterstützung  
anschließbar

2 Receiver über Legacy-Ausgang  
anschließbar

SCR-Protokoll gemäß EN 50494

Wetterschutzgehäuse

Feed-ø 40 mm

#### LOCAL OSCILLATOR

Low band : 9,75 GHz

High band : 10,6 GHz

Accuracy : ± 1 MHz

Temperature drift : ± 3 MHz

Phase noise : -80 @10kHz

#### LNB CONTROL

Vertical : 11,5 ... 14 V

Horizontal : 16 ... 19 V

Band switch : 22 kHz

DiSEqC : 1

#### AMBIENT OPERATING CONDITIONS

Ambient temperature : -30 ... 60 °C

#### INPUT FREQUENCY RANGE

Low band : 10,7 ... 11,7 GHz

High band : 11,7 ... 12,75 GHz

#### NOISE FACTOR

Noise figure : 1 dB

#### OUTPUT FREQUENCY RANGE

Low band : 950 ... 1.950 MHz

High band : 1.100 ... 2.150 MHz

#### POWER SUPPLY

Power consumption : max. 280 mA @13,5 V

#### SINGLE-CABLE OUTPUT

Output frequency : 950 ... 2.150 MHz

Number of output channels : 4

Frequency of the output channels : 1210,  
1420, 1680, 2040 MHz

#### TECHNICAL DATA

Outputs : 3 ; 1x SCR (gilded), 2x Legacy

Connector type : F-Buchse

Amplification : 57 dB

Impedance : 75 Ω

Feed reception : ø 40 mm

#### SCOPE OF DELIVERY

TechniSat SCR-LNB