


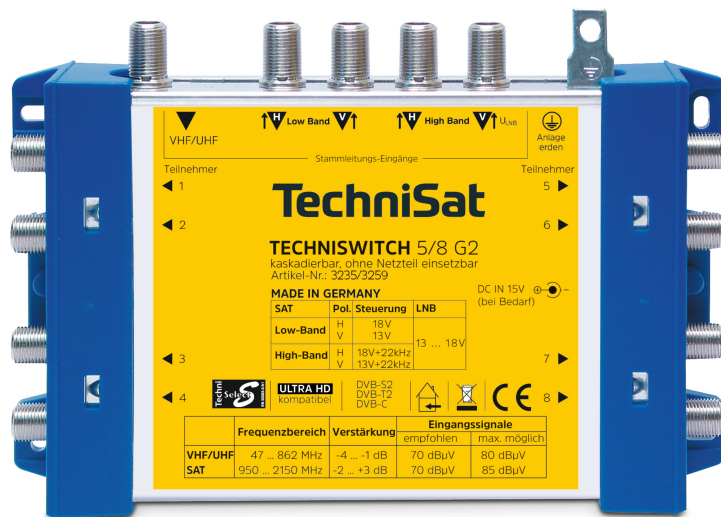

2 YEARS
WARRANTY

ENERGY
SAVER

BESSER
MADE IN
GERMANY

TECHNISWITCH 5/8 G2

Multi-switch system with connection possibility of 4 levels for distribution to up to 24 participants

EAN	Colour	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588353596	blue/yellow	3235/3259	600 g	300 g	17,2 x 11,2 x 3,3 cm	17,5 x 13,4 x 10,5 cm

TOP FEATURES

For distribution of one satellite position
Up to 24 subscribers can be connected

For connecting a Quatro LNB
Up to 100 m distribution length due to inclination compensation

Energy saving - no mains adapter for operation
No attenuation in satellite range

AMBIENT OPERATING CONDITIONS

Ambient temperature : -25 ... 55 °C

AMPLIFICATION

Sat : -2 ... 3 dB

Terrestrial : -4 ... -1 dB

DECOUPLING

Output : > 35 dB

GENERAL CHARACTERISTICS

Top features : For distribution of one satellite position

Top features : Up to 24 subscribers can be connected

Top features : For connecting a Quatro LNB

Top features : Up to 100 m distribution length due to inclination compensation

Top features : Energy saving - no mains adapter for operation

Top features : No attenuation in satellite range

POWER SUPPLY

Mains adapter : extern DC 15V/1,2A

Nominal voltage : 100 ... 240 V

Frequency : 50 ... 60 Hz

RECEPTION RANGE

Sat : 950 ... 2.150 MHz

Terrestrial : 47 ... 862 MHz

TECHNICAL DATA

Satellite inputs : 4

Terrestrial input : 1

Outputs : 8

Distribution length : max. 100 m

SCOPE OF DELIVERY

TechniSwitch 5/8 G2, Power supply, manual