


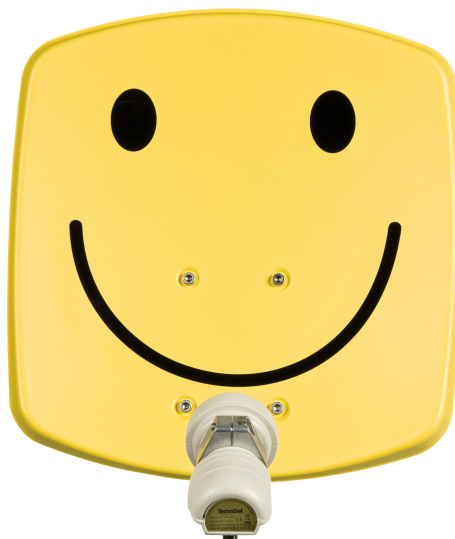

DIGIDISH 33 with Universal-V/H-LNB

The DigiDish 33 is enormously high-performance for its size and takes up very little space

EAN	Item no.
4019588332942	1033/2194
4019588333291	1333/2194
4019588341944	1433/2194
4019588733947	1733/2194
4019588533943	1533/2194

TOP FEATURES

Only 33 cm small

1 or 2 participants

1 orbital position (for example Astra 19.2° East)

Especially suitable for balcony installation / Ideal for the city

Ideal for ground and wall mounting

LOCAL OSCILLATOR

Low band : 9,75 GHz

High band : 10,7 GHz

LNB CONTROL

Vertical : 11,5 - 14 V

Horizontal : 16 - 19 V

Band switch : 22 kHz

GENERAL CHARACTERISTICS

Top features : Only 33 cm small

Material : Aluminium

Top features : 1 or 2 participants

Top features : 1 orbital position (for example Astra 19.2° East)

Top features : Especially suitable for balcony installation / Ideal for the city

Top features : Ideal for ground and wall mounting

Material strength : 1 mm

Coating : Powder-coated on both sites

including Wall bracket : Yes

INPUT FREQUENCY RANGE

Low band : 10,7 ... 11,7 GHz

High band : 11,7 ... 12,75 GHz

NOISE FACTOR

Lower frequency range : 0,7 dB max.

Upper frequency range : 0,7 dB max.

OUTPUT FREQUENCY RANGE

Low band : 950 - 1.950 MHz

High band : 1.100 - 2.150 MHz

POWER SUPPLY

LNB voltage supply : 11,5 ... 19 V

Power consumption : max. 190 mA

TECHNICAL DATA

F/D : 0,6

Gain : 30 dBi @11,3 GHz

Offset angle : 30 °

Feed reception : 40 mm

SCOPE OF DELIVERY

Satellite dish 33 cm, LNB, Wall bracket, Screws, Tool, Mounting instruction

Universal-V/H-LNB

ARTICLE INFORMATION	Vertical : 11,5 ... 14 V	Low band : 950 ... 1.950 MHz
EAN : 4019588178946	Horizontal : 16 ... 19 V	High band : 1.100 ... 2.150 MHz
Colour : grey	Band switch : 22 kHz	POWER SUPPLY
Item no. : 0017/8194	AMBIENT OPERATING CONDITIONS	LNB voltage supply : 11,5 ... 19 V
Weight (Box) : 200 g	Humidity : 10 ... 90 %	Power consumption : max. 190 mA
Weight : 120 g	Ambient temperature : -30 ... 60 °C	TECHNICAL DATA
Device (W x H x D) : 5,8 x 5,8 x 11,3 cm	INPUT FREQUENCY RANGE	Outputs : 1
Box : 6,5 x 6,5 x 12 cm	Low band : 10,7 ... 11,7 GHz	Impedance : 75 Ω
LOCAL OSCILLATOR	High band : 11,7 ... 12,75 GHz	Feed reception : 40 mm
Low band : 9,75 GHz	NOISE FACTOR	Amplification : 50 ... 65 dB
High band : 10,6 GHz	Noise figure : 0,7 dB	Connector type : F-Buchse
LNB CONTROL	OUTPUT FREQUENCY RANGE	

Testurteil(e) DIGIDISH 33 with Universal-V/H-LNB



Readers' Choice for the
König-Kunde-Award 2014:
2nd place in the satellite
equipment category
(Camping, Cars & Caravans)

black/white