


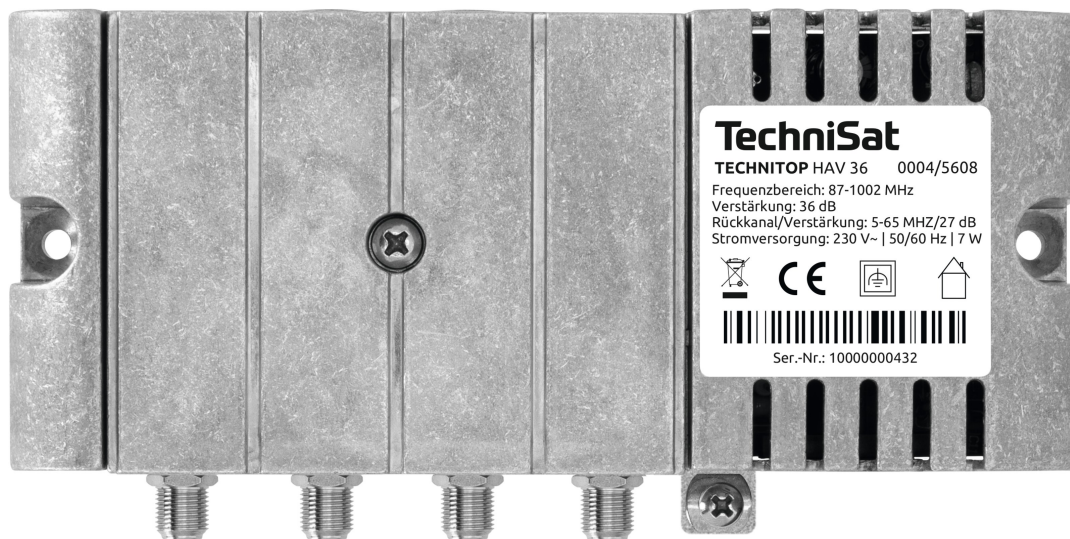

TECHNITOP HAV 36

CATV amplifier with 36 dB gain and active return path of 5-65 MHz.

EAN	Colour	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588456082	silber	0004/5608	662 g	580 g	18,5 x 9,1 x 4,6 cm	21 x 5,8 x 15 cm

TOP FEATURES

27/36 dB amplification
in the alu-diecast housing

with measurement jacks at in- and output
adjustable attenuation and equalization

shielding class A according to EN 50083-2

AMBIENT OPERATING CONDITIONS

Ambient temperature : 10 ... 75 °C

IP class : 20

Temperature : -20 ... 50 °C

GENERAL CHARACTERISTICS

Top features : 27/36 dB amplification

Top features : in the alu-diecast housing

Top features : with measurement jacks at
in- and output

Top features : adjustable attenuation and
equalization

Top features : shielding class A according to
EN 50083-2

POWER SUPPLY

Nominal voltage : 230 V ~

Frequency : 50 Hz

Effective output : 7 W

RANGE OF ADJUSTMENT

Attenuator : 15 dB

Equaliser : 15 dB

TECHNICAL DATA

Frequency range : 85 ... 1.006 MHz

Amplification : 27 / 36 dB umschaltbar

Output level : 109 (CTB, CSO EN60728-3)

Interstage attenuator : 6 dB

Frequency range return path : 5 ... 65 MHz

Noise factor : ≤ 6,5 dB

Shielding factor : ≥ 80 dB EN 50083-2
(Klasse A)

Output + input measuring points : -20 dB (±
2,5)

Connector type : F female

Impedance : 75 Ω

Return loss : ≥ 14 dB (-1,5 dB/Okt.)

SCOPE OF DELIVERY

TECHNITOP HAV 36, mains cable, manual