


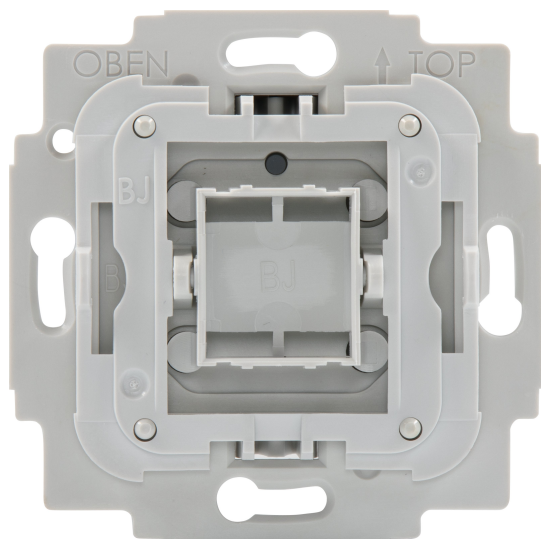

Dimmer flush mount, BJ

Compatible with Busch-Jaeger switch ranges

EAN	Colour	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588394971	light/gray	0300/9497	130 g	70 g	7 x 7 x 4,5 cm	11,5 x 10,5 x 5,8 cm

TOP FEATURES

Integration/control with TechniSat CONNECT

Device for flush mounting in standard device boxes

Compatible with Busch-Jaeger switch ranges

Measuring of energy consumption

Integrated scene control

Integrated Z-Wave™ repeater function

Electronic overload protection

AMBIENT STORAGE CONDITIONS

Temperature : -20 ... 60 °C

Humidity : 5 ... 90 %

AMBIENT OPERATING CONDITIONS

IP class : 20

Ambient temperature : 5 ... 35 °C

Humidity : 10 ... 75 %

FUNK COMMUNICATION

Telecommunication : Z-Wave Plus

funk_security_s2 : Yes

funk_smartstart : Yes

Range inside : max. 40 m

operating frequency : 868,42 MHz

Repeater function : Yes

POWER SUPPLY

Frequency : 50 Hz ± 10 %

Nominal voltage : 230 V ± 10 %

Effective output : 200 W

Power consumption : < 3 mA (without load)

SCOPE OF DELIVERY

Dimmer insert, compensation frame, assembly instructions, fastening screws
