


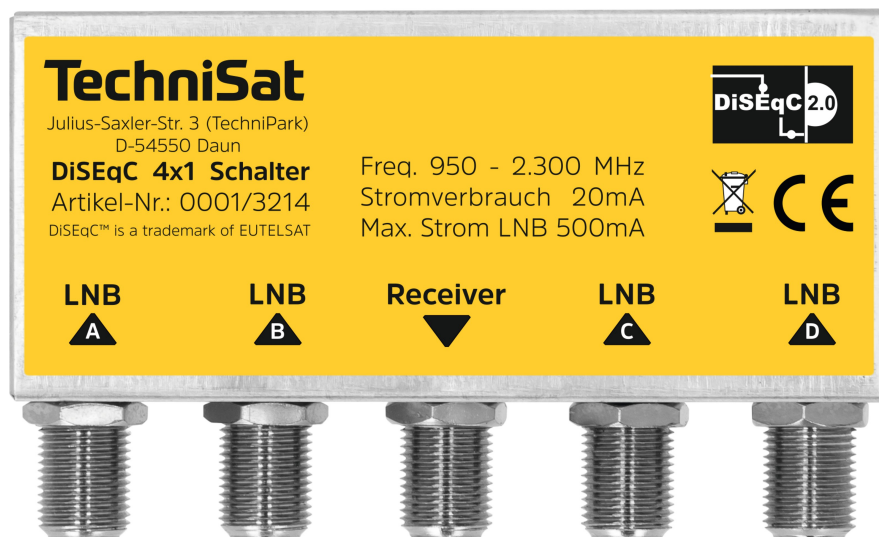

DiSEqC 4x1 Switch

TechniSwitch DiSEqC-Relais with weatherproof housing

EAN	Colour	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588132146	silber/gelb	0001/3214	130 g	120 g	9,7 x 10,1 x 2,3 cm	9,7 x 10,1 x 2,3 cm

TOP FEATURES

4 satellite positions for 1 receiver

Weatherproof housing for mast mounting

Low internal power consumption - only 20 mA

LNB CONTROL

DiSEqC : 2

Current consumption : max. 500 mA

GENERAL CHARACTERISTICS

Top features : 4 satellite positions for 1 receiver

Top features : Weatherproof housing for mast mounting

Top features : Low internal power consumption - only 20 mA

POWER SUPPLY

Power consumption : 20 mA vom Empfangsgerät

RECEPTION RANGE

Sat : 920 ... 2.300 MHz

TECHNICAL DATA

Satellite inputs : 4

Outputs : 1

TRANSMISSION LOSS

Sat : 3 dB

SCOPE OF DELIVERY

DiSEqC 4x1 switch, weatherproof housing, 2 cable ties