


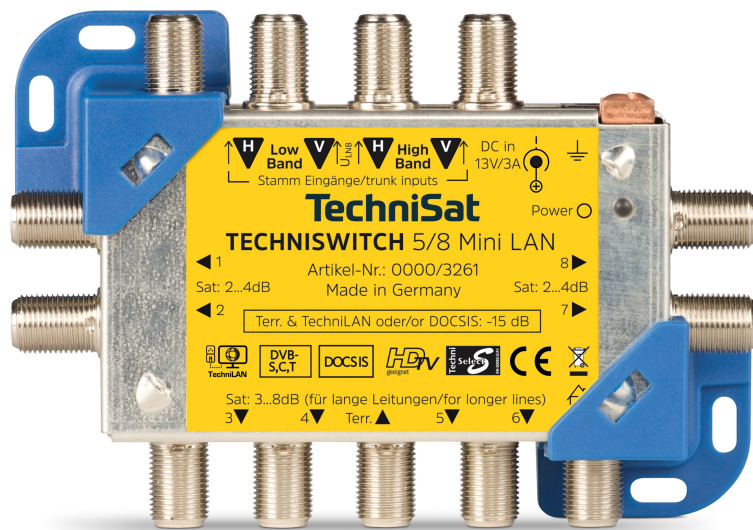

TECHNISWITCH 5/8 Mini LAN

Compact multiswitch for distribution of 4 IF levels and terrestrial signals for 8 participants. Including TECHNILAN support to distribute Internet and other network services over the existing satellite wiring

EAN	Colour	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588032613	blue/yellow	0000/3261	500 g	160 g	7,9 x 3,3 x 11,5 cm	23 x 6 x 15,2 cm

TOP FEATURES

Gain in satellite range

Slope fixed correction

For Quattro-LNB

TechniLAN suitable

Input for terrestrial signals

Suitable for DOCSIS

AMBIENT OPERATING CONDITIONS

Humidity : 10 ... 75 %

Ambient temperature : -25 ... 45 °C

AMPLIFICATION

Sat : 2 ... 4 dB , bottom taps 3 ... 8 dB

Terrestrial : -15 dB

DECOUPLING

Output : > 30 dB

GENERAL CHARACTERISTICS

Top features : Gain in satellite range

Top features : Slope fixed correction

Top features : For Quattro-LNB

Top features : TechniLAN suitable

Top features : Input for terrestrial signals

Top features : Suitable for DOCSIS

POWER SUPPLY

Mains adapter : Extern, DC 13 V / 3 A

Nominal voltage : 100 ... 240 V

Frequency : 50 ... 60 Hz

RECEPTION RANGE

Sat : 950 ... 2.150 MHz

Terrestrial : 80 ... 790 MHz

Return path : 2 ... 65 MHz

TECHNICAL DATA

Satellite inputs : 4

Terrestrial input : 1

Outputs : 8

Distribution length : max. 100 m

SCOPE OF DELIVERY

TECHNISWITCH 5/8 Mini LAN, instruction manual, power supply (13 V/3 A)