


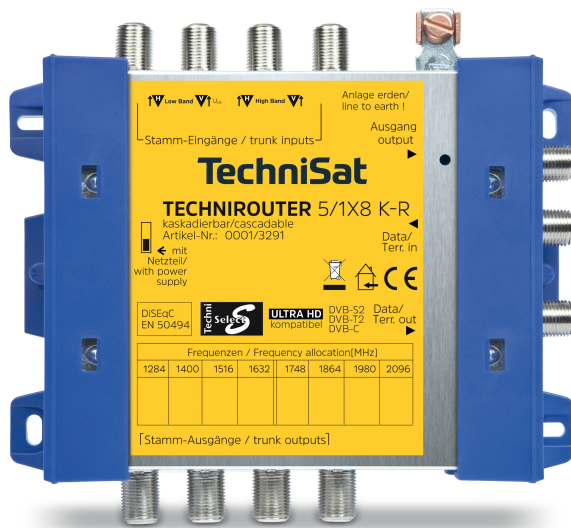

TECHNIROUTER 5/1x8 K-R

EAN	Colour	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588132917	silber/gelb	0001/3291	426 g	260 g	14 x 13 x 3,2 cm	24,5 x 13,5 x 5,5 cm

TOP FEATURES

DiSEqC according to EN 50494

1 orbit position without restrictions

Return channel compatible

No new wiring required

Energy-saver - can be used without power supply

Can be integrated into a multi-switch distribution

AMBIENT OPERATING CONDITIONS

Ambient temperature : -25 ... 55 °C

Humidity : 10 ... 75 %

AMPLIFICATION

Sat : 13 ... 18 dB

Terrestrial : -8 dB

DECOUPLING

Trunks : 45 dB

GENERAL CHARACTERISTICS

Top features : DiSEqC according to EN 50494

Top features : 1 orbit position without restrictions

Top features : Return channel compatible

Top features : No new wiring required

Top features : Energy-saver - can be used without power supply

Top features : Can be integrated into a multi-switch distribution

POWER SUPPLY

Power consumption : 210 mA @13V (SCR-Ausgang)

RECEPTION RANGE

Return path : 5 ... 65 MHz

Terrestrial : 65 ... 862 MHz

Sat : 950 ... 2.150 MHz

SINGLE-CABLE OUTPUT

Output frequency : 5 ... 2.150 MHz

Number of output channels : 8

Frequency of the output channels : 1284, 1400, 1516, 1632, 1748, 1864, 1980, 2096 MHz

Frequency SAT : 950 ... 2.150 MHz

Frequency DVB-T : 65 ... 862 MHz

TECHNICAL DATA

Satellite inputs : 4

Terrestrial input : 1

Number of cable connections : 1

Subscribers per cable : maximal 8

TRANSMISSION LOSS

Sat : 2 ... 5 dB

Terrestrial : 2 ... 3 dB

TUNER

TECHNIROUTER ready : Yes