


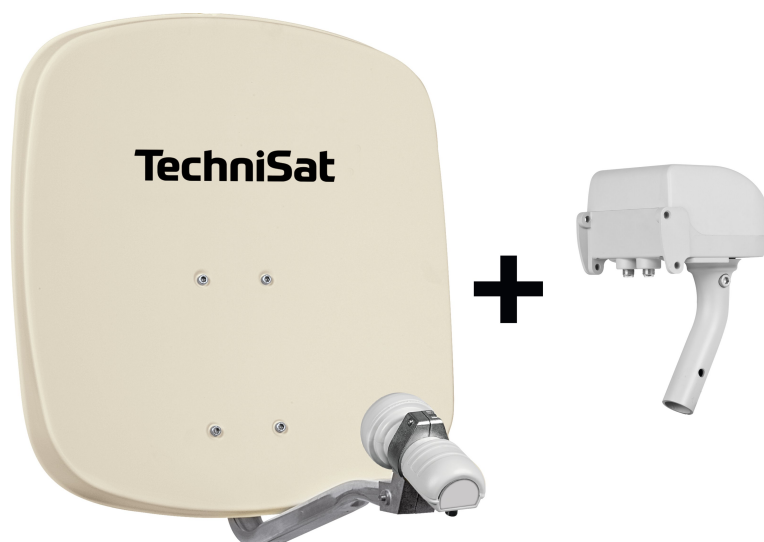

3 YEARS
WARRANTY

2 YEARS
WARRANTY

SKYRIDER

EAN	Item no.	Colour
4019588450721	1045/1572	beige
4019588453722	1345/1572	slate/grey
4019588454729	1445/1572	red
4019588175723	1745/1572	white

TOP FEATURES

Only 45 cm small

1 or 2 participants

Many orbital positions

Especially suitable for balcony installation
/ Ideal for the city

Ideal for ground and wall mounting

Also available as a complete package
including a digital satellite receiver

LOCAL OSCILLATOR

Low band : 9,75 GHz $\pm$ 3MHz

High band : 10,6 GHz $\pm$ 3MHz

LNB CONTROL

Band switch : 22 kHz

Vertical : 11,5 ... 14 V

Horizontal : 16 ... 19 V

GENERAL CHARACTERISTICS

Material : Aluminium

Top features : Only 45 cm small

Top features : 1 or 2 participants

Top features : Many orbital positions

Top features : Especially suitable for
balcony installation / Ideal for the city

Top features : Ideal for ground and wall
mounting

Top features : Also available as a complete
package including a digital satellite receiver

Material strength : 1 mm

Coating : Powder-coated on both sites

including Wall bracket : Yes

INPUT FREQUENCY RANGE

Low band : 10,7 ... 11,7 GHz

High band : 11,7 ... 12,75 GHz

NOISE FACTOR

Lower frequency range : 0,7 dB max.

Upper frequency range : 0,7 dB max.

OUTPUT FREQUENCY RANGE

Low band : 950 ... 1.950 MHz

High band : 1.100 ... 2.150 MHz

TECHNICAL DATA

F/D : 0,6

Offset angle : 30 °

Gain : 32,2 dBi @11,3GHz

Feed reception : 40 mm

Universal-V/H-LNB

ARTICLE INFORMATION	Vertical : 11,5 ... 14 V	Low band : 950 ... 1.950 MHz
EAN : 4019588178946	Horizontal : 16 ... 19 V	High band : 1.100 ... 2.150 MHz
Colour : grey	Band switch : 22 kHz	POWER SUPPLY
Item no. : 0017/8194	AMBIENT OPERATING CONDITIONS	LNB voltage supply : 11,5 ... 19 V
Weight (Box) : 200 g	Ambient temperature : -30 ... 60 °C	Power consumption : max. 190 mA
Weight : 120 g	Humidity : 10 ... 90 %	TECHNICAL DATA
Device (W x H x D) : 5,8 x 5,8 x 11,3 cm	INPUT FREQUENCY RANGE	Outputs : 1
Box : 6,5 x 6,5 x 12 cm	Low band : 10,7 ... 11,7 GHz	Amplification : 50 ... 65 dB
LOCAL OSCILLATOR	High band : 11,7 ... 12,75 GHz	Impedance : 75 Ω
Low band : 9,75 GHz	NOISE FACTOR	Feed reception : 40 mm
High band : 10,6 GHz	Noise figure : 0,7 dB	Connector type : F-Buchse
LNB CONTROL	OUTPUT FREQUENCY RANGE	

COAXSAT 2150 Set 10 m + 2 F-Stecker

ARTICLE INFORMATION	Item no. : 0001/3610
EAN : 4019588136106	Weight (Box) : 388 g
Colour : white	Weight : 388 g

black/white
black/white