


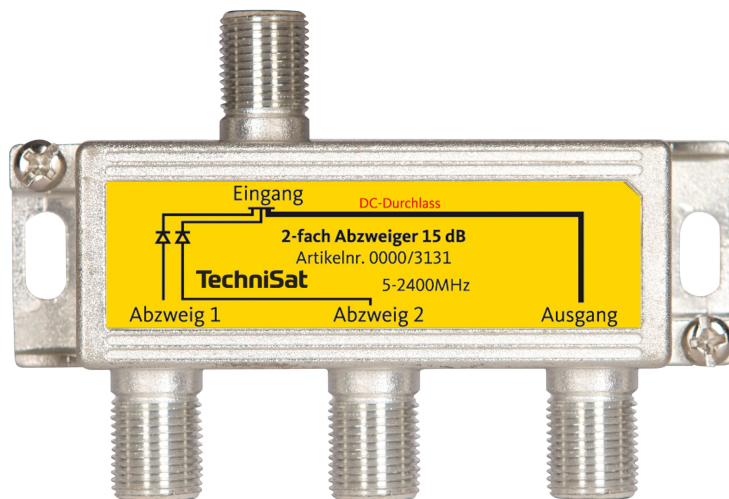

2-way SAT tap 15 dB

Broadband 2-way tap, 15 dB

EAN	Item no.	Colour
4019588031319	0000/3131	silver

TOP FEATURES

Screening factor class A, EN 50083
Broadband using from 5 to 2.400 MHz

diode decoupled
DC path through on trunk

TECHNIROUTER-compatible

DECOUPLING

5 - 862 MHz : > 35 dB

950 - 1750 MHz : > 30 dB

1750 - 2150 MHz : > 28 dB

GENERAL CHARACTERISTICS

Top features : Screening factor class A, EN 50083

Top features : Broadband using from 5 to 2.400 MHz

Top features : diode decoupled

Top features : DC path through on trunk

Top features : TECHNIROUTER-compatible

RETURN LOSS

5 - 862 MHz : > 10 dB

950 - 1750 MHz : > 10 dB

1750 - 2150 MHz : > 10 dB

TAP LOSS

5 - 862 MHz : 15 dB ($\pm 1,5$)

950 - 1750 MHz : 15 dB (± 2)

1750 - 2400 MHz : 15 dB ($\pm 2,5$)

TECHNICAL DATA

Input : 1

Outputs : 3 (1+2)

Frequency range : 5 ... 2.400 MHz

Shielding factor : ≥ 75 dB EN 50083-2 (Class A)

Connector type : F female

Impedance : 75 Ω

TRANSMISSION LOSS

5 - 862 MHz : Typ. 2,5 dB

950 - 1750 MHz : Typ. 3,5 dB

1750 - 2400 MHz : Typ. 4,5 dB