


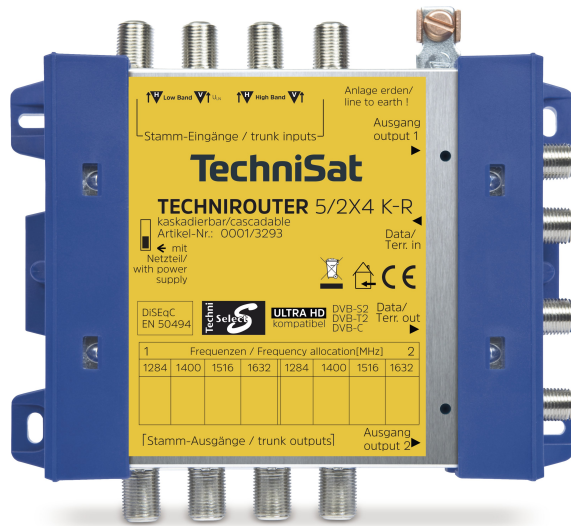

TECHNIROUTER 5/2x4 K-R

TECHNIROUTER cascade, suitable for return channel. Enables the connection of 4 IF levels (satellite blocks) and a terrestrial input for distribution to two cable strands for 4 participants each

EAN	Colour	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588132931	silber/gelb	0001/3293	422 g	260 g	14 x 13 x 3,2 cm	24,5 x 13,5 x 5,5 cm

TOP FEATURES

DiSEqC gemäß EN 50494

1 Orbitposition ohne Einschränkungen

Rückkanal-tauglich

Keine neue Kabelverlegung erforderlich

Stromsparend ohne Netzteil einsetzbar

In eine Multischalterverteilung integrierbar

AMBIENT OPERATING CONDITIONS

Ambient temperature : -25 ... 55 °C

Humidity : 10 ... 75 %

AMPLIFICATION

Sat : 17 ... 22 dB

Terrestrial : -12 dB

DECOUPLING

Trunks : 45 dB

GENERAL CHARACTERISTICS

Top features : DiSEqC gemäß EN 50494

Top features : 1 Orbitposition ohne Einschränkungen

Top features : Rückkanal-tauglich

Top features : Keine neue Kabelverlegung erforderlich

Top features : Stromsparend ohne Netzteil einsetzbar

Top features : In eine Multischalterverteilung integrierbar

POWER SUPPLY

Power consumption : 210 mA @13V (je SCR-Ausgang)

RECEPTION RANGE

Return path : 5 ... 65 MHz

Terrestrial : 65 ... 862 MHz

Sat : 950 ... 2.150 MHz

SINGLE-CABLE OUTPUT

Output frequency : 5 ... 2.150 MHz

Number of output channels : 2 x 4

Frequency of the output channels : 1284, 1400, 1516, 1632 MHz

Frequency SAT : 950 ... 2.150 MHz

Frequency DVB-T : 65 ... 862 MHz

TECHNICAL DATA

Satellite inputs : 4

Terrestrial input : 1

Number of cable connections : 2

Subscribers per cable : maximal 4

TRANSMISSION LOSS

Sat : 2 ... 5 dB

Terrestrial : 2 ... 3 dB

TUNER

TECHNIROUTER ready : Yes

SCOPE OF DELIVERY

TECHNIROUTER5/2x4 K-R, manual