


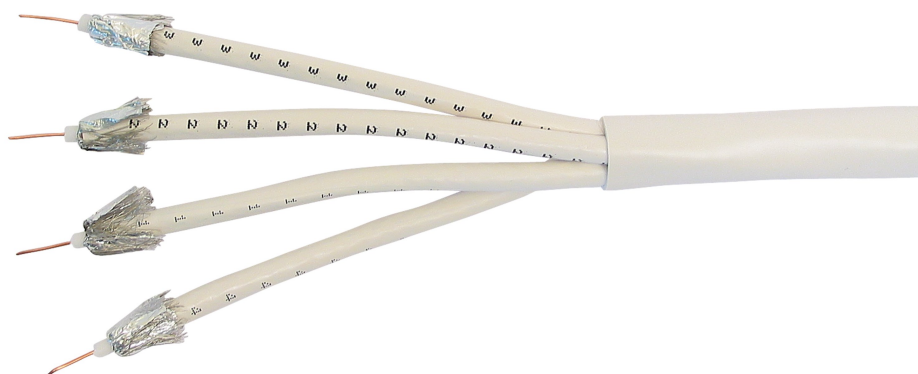

COAXSAT 115-4x3.6

Double high-frequency cable with small diameter and 100db screening for the Sat. and BK field

EAN	Item no.
4019588330146	0003/3014

ATTENUATION	Capacity : 55 pF
5 MHz : 2,45	Shrinkage factor : 0,85
10 MHz : 3,34	Shielding factor : ≥ 115 dB □ Klasse A+
25 MHz : 5,05	TRANSFER IMPEDANCE
45 MHz : 6,57	5MHz : $\leq 0,5$
100 MHz : 7,2	30 MHz : $\leq 0,05$
200 MHz : 11,8	
300 MHz : 13,9	
450 MHz : 17,8	
800 MHz : 24,6	
1000 MHz : 28,7	
1350 MHz : 33,2	
1750 MHz : 38,6	
2050 MHz : 42,9	
RETURN LOSS	
5 - 30 MHz : ≥ 28 dB	
30 - 65 MHz : ≥ 22 dB	
65 - 470 MHz : ≥ 22 dB	
470 - 1800 MHz : ≥ 20 dB	
1800 - 2450MHz : ≥ 19 dB	
TECHNICAL DATA	
Frequency range : 5 ... 3.000 MHz	
Impedance : $75 \Omega (\pm 3)$	
Inner cable diameter : 0,8 mm	
Inner cable material : Copper bare (OFC)	
Isolation : Zell-PE	
Diameter dielectric : 3,6 mm ($\pm 0,1$)	
Outer cable : 1x Alu-Folie geklebt + 1x Cu-Geflecht Sn + 1x Alu-Folie doppelt kaschiert	
Sheath : PVC, withe	
Diameter with coating : 15,4 mm ($\pm 0,2$)	
Bending radius : ≥ 50 mm	
Coupling resistance : $\leq 0,5 @ 5$ MHz	