


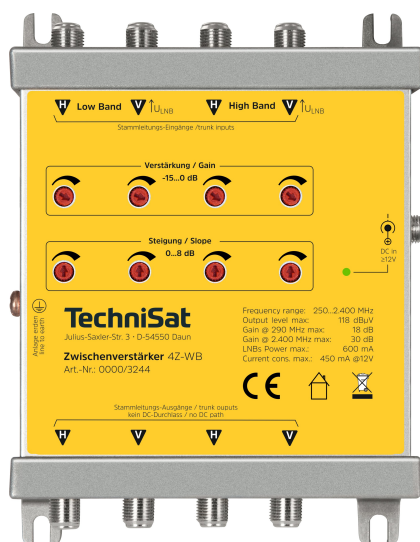

Line Amplifier 4Z-WB

4-way line amplifier

EAN	Colour	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588032446	silver/yellow	0000/3244	680 g	450 g	15 x 10,5 x 3,7 cm	24 x 12,5 x 5 cm

TOP FEATURES

Compensates the attenuation of 80 meters of RG6 cable

Frequenzbereich: 250 - 2400 MHz

Verstärkung einstellbar (max. 30 dB bei 2400 MHz)

Schräglage einstellbar 0 - 8 dB

Für 2 Wideband-LNBs oder 1 Quattro-LNB

AMBIENT OPERATING CONDITIONS

Ambient temperature : -25 bis 55 °C

Humidity : 10 - 75 %

AMPLIFICATION

Sat : 18 - 30 dB

DECOUPLING

Trunks : 40 dB

GENERAL CHARACTERISTICS

Top features : Compensates the attenuation of 80 meters of RG6 cable

Top features : Frequenzbereich: 250 - 2400 MHz

Top features : Verstärkung einstellbar (max. 30 dB bei 2400 MHz)

Top features : Schräglage einstellbar 0 - 8 dB

Top features : Für 2 Wideband-LNBs oder 1 Quattro-LNB

POWER SUPPLY

Nominal voltage : 230 V DC

Frequency : 50 Hz

Mains adapter : external (DC 12 V / 2,0 A)

Power consumption : typ. 560 mA @12V

RECEPTION RANGE

Sat : 250 - 2.400 MHz

TECHNICAL DATA

Satellite inputs : 4

Distribution length : 80 m

SCOPE OF DELIVERY

Line Amplifier 4Z-WB, power supply, instruction manual