


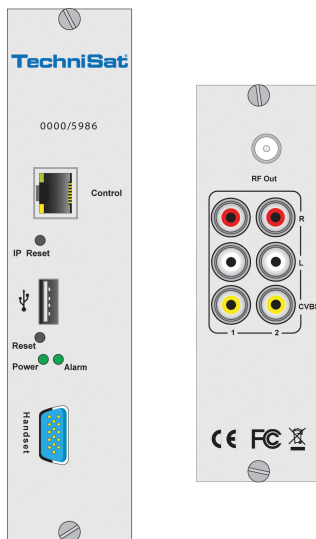

AV/PAL-TWIN-Modulator

Convert 2 AV signals into 2 analogue PAL B/G channels

EAN	Item no.	Weight (Box)	Weight	Box
4019588059863	0000/5986	300 g	300 g	8,5 x 16,5 x 47,5 cm

TOP FEATURES

2x Analogue AV input, PAL/NTSC,SECAM
Stereo sound

Two adjacent analog channels output in
range of 48...860 MHz

Output level 100 dB μ V per channel

Control and supervision by web interface
or external handset

AMBIENT OPERATING CONDITIONS

Ambient temperature : 0 ... 45 °C

Humidity : 10 ... 90 %

Output frequency : 48 ... 860 MHz

Output level : 100 dB per channel

CONNECTIONS

Ethernet 10/100 (RJ-45) : Yes Remote-
Control

Video IN : 1

Audio input analogue (RCA) : Yes

GENERAL CHARACTERISTICS

Top features : 2x Analogue AV input,
PAL/NTSC,SECAM

Top features : Stereo sound

Top features : Two adjacent analog
channels output in range of 48...860 MHz

Top features : Output level 100 dB μ V per
channel

Top features : Control and supervision by
web interface or external handset

RF MODULATOR

Modulation : CCIR PAL B/G

RF OUTPUT CONVERTER

Harmonic product : $\leq$ -50 dB typisch

Noise : $\leq$ 45 typisch

C/N : $\geq$ 45 dB typisch