


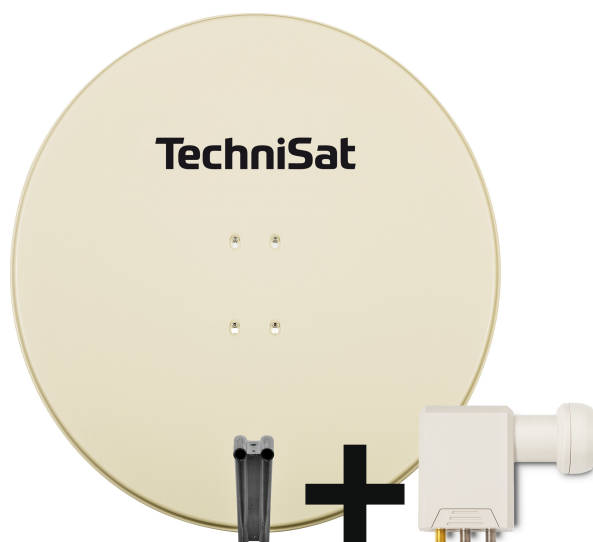

SATMAN 850 PLUS with SCR-LNB

EAN	Item no.	Colour	Weight (Box)	Weight	Device (W x H x D)	Box
4019588085862	6085/8886	beige	8,8 kg	5,2 kg	89 x 85 x 7,5 cm	92,75 x 88 x 23,5 cm
4019588285866	6285/8886	fir/green	8,8 kg	5,2 kg	89 x 85 x 7,5 cm	92,75 x 88 x 23,5 cm
4019588385863	6385/8886	slate/grey	8,8 kg	5,2 kg	89 x 85 x 7,5 cm	92,75 x 88 x 23,5 cm
4019588485860	6485/8886	brick/red	8,8 kg	5,2 kg	89 x 85 x 7,5 cm	92,75 x 88 x 23,5 cm
4019588785861	6785/8886	polar/white	8,8 kg	5,2 kg	89 x 85 x 7,5 cm	92,75 x 88 x 23,5 cm
4019588585867	6585/8886	yellow with Smiley	8,8 kg	5,2 kg	89 x 85 x 7,5 cm	92,75 x 88 x 23,5 cm

TOP FEATURES

85 cm Spiegel aus erstklassigem Aluminium (beidseitig pulverbeschichtet)
Inkl. SCR-LNB
Ausgelegt für den 6-Teilnehmer-Empfang

4 Teilnehmer über SCR
2 Teilnehmer über Legacy
1 Orbitposition (z. B. Astra 19,2° Ost)

Optimal für Wand- und Dachmontage

LOCAL OSCILLATOR

Low band : 9,75 GHz

High band : 10,7 GHz

LNB CONTROL

Vertical : 11,5 - 14,5 V

Horizontal : 16 - 19 V

GENERAL CHARACTERISTICS

Material : Aluminium

Material strength : 1,6 mm

Coating : Powder-coated on both sites

INPUT FREQUENCY RANGE

Low band : 10,7 ... 11,7 GHz

High band : 11,7 ... 12,75 GHz

NOISE FACTOR

Lower frequency range : 0,6 dB max.

Upper frequency range : 0,6 dB max.

OUTPUT FREQUENCY RANGE

Low band : 950 - 1.950 MHz

High band : 1.100 - 2.150 MHz

TECHNICAL DATA
F/D : 0,67
G/T : 17,2
Offset angle : 21 °
Gain : 38,2 dBi @11,3GHz
Mast Ø : 65 mm max.
Feed reception : LNB retaining clamp (40mm)