


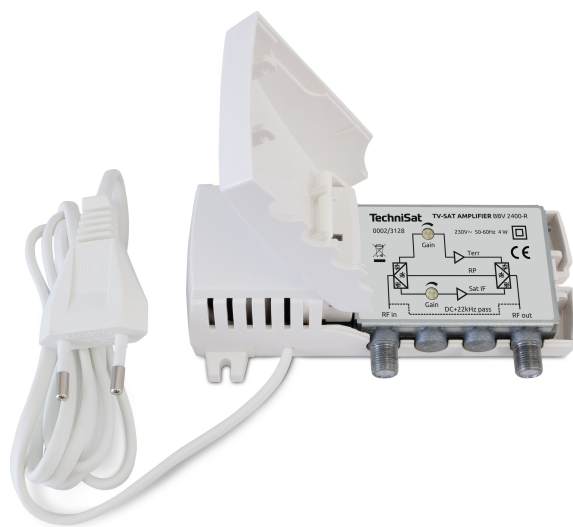

TV-SAT AMPLIFIER BBV 2400-R

For amplification of terrestrial and satellite signals

EAN	Colour	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588231283	white	0002/3128	352 g	328 g	13 x 4 x 6,5 cm	14 x 5 x 9,7 cm

AMBIENT OPERATING CONDITIONS

Ambient temperature : -20 ... 50 °C

AMPLIFICATION

Return path : -4 dB

Terrestrial : 14 ... 18 dB (slop)

Sat : 18 ... 25 dB (slop)

POWER SUPPLY

Mains adapter : internal

Nominal voltage : 230 V ~

Frequency : 50 ... 60 Hz

Effective output : 4 W

RECEPTION RANGE

Return path : 5 ... 65 MHz

Terrestrial : 87 ... 862 MHz

Sat : 950 ... 2.400 MHz

TECHNICAL DATA

Shielding factor : ≥ 75 dB EN 50083-2 (Class A)

Impedance : 75 Ω

Connector type : F female/F female

Return loss : ≤ 10 dB

SCOPE OF DELIVERY

TV-SAT VERSTÄRKER BBV 2400-R, mounting instructions