


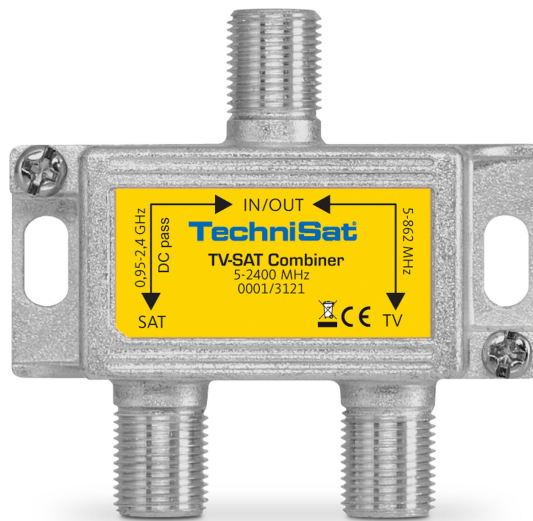

UHF/VHF-Sat-Combiner

For combining of terrestrial and satellite signals

EAN	Colour	Item no.	Input	TV/R (40 - 860 MHz)	SAT (950 - 2050 MHz)	950 - 2050 MHz	Decoupling	40 - 860 MHz	Weight (Box)	Weight
40195881 31217	silver/yellow	0001/3121	2	Nein	(max. 500 mA)	2 dB	20 dB	1,5 dB	200 g	200 g

DC OUTLET

Terrestrial : No

SAT : 30V/1A

DECOUPLING

5 - 862 MHz : 25 dB

950 - 1750 MHz : 25 dB

1750 - 2150 MHz : 25 dB

RETURN LOSS

5 - 862 MHz : 11 dB

950 - 1750 MHz : 11 dB

1750 - 2150 MHz : 11 dB

TECHNICAL DATA

Input : 2

Outputs : 1

Frequency range : 5 ... 2.400 MHz

Shielding factor : ≥ 75 dB EN 50083-2 (Class A)

Connector type : F female

Impedance : 75 Ω

TRANSMISSION LOSS

5 - 862 MHz : 1,5 dB

950 - 1750 MHz : 1,5 dB

1750 - 2150 MHz : 1,5 dB