


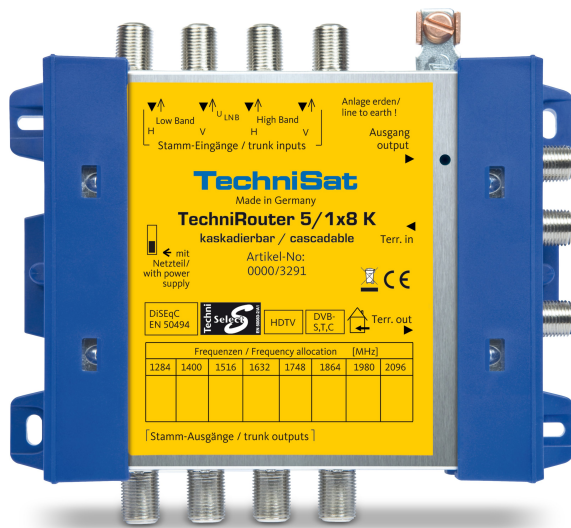

## TECHNIROUTER 5/1x8 K

Digital single-cablesolution for the distribution of satellite signals from one orbital position via a cable harness for an existing cable structure

| EAN           | Colour      | Item no.  | Weight (Box) | Weight | Device (W x H x D) | Box                  |
|---------------|-------------|-----------|--------------|--------|--------------------|----------------------|
| 4019588032910 | blue/yellow | 0000/3291 | 400 g        | 200 g  | 14 x 13 x 3,2 cm   | 24,5 x 13,5 x 5,5 cm |

### AMBIENT OPERATING CONDITIONS

Ambient temperature : -25 ... 55 °C

Humidity : 10 ... 75 %

### AMPLIFICATION

Sat : 13 ... 18 dB

Terrestrial : -8 dB

### DECOUPLING

Trunks : 45 dB

### RECEPTION RANGE

Terrestrial : 47 ... 862 MHz

Sat : 950 ... 2.150 MHz

### SINGLE-CABLE OUTPUT

Output frequency : 47 ... 2.150 MHz

Number of output channels : 8

Frequency of the output channels : 1284, 1400, 1516, 1632, 1748, 1864, 1980, 2096 MHz

Frequency SAT : 950 ... 2.150 MHz

Frequency DVB-T : 47 ... 862 MHz

### TECHNICAL DATA

Satellite inputs : 4

Terrestrial input : 1

Number of cable connections : 1

Subscribers per cable : maximal 8

### TRANSMISSION LOSS

Sat : 3 ... 5 dB

Terrestrial : 2 ... 3 dB

### TUNER

TECHNIROUTER ready : Yes

### SCOPE OF DELIVERY

TechniRouter 5/1x8 K, Instruction manual