


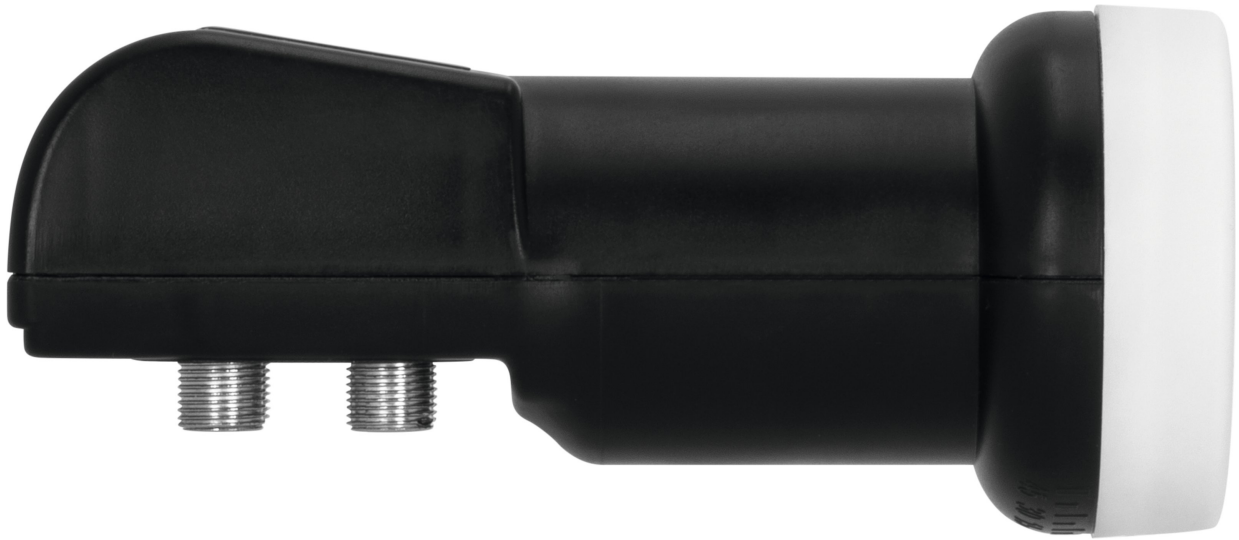

Universal-Quattro-Switch-LNB

EAN	Colour	Item no.
4019588208988	black	0020/8980

TOP FEATURES

Ultra low noise	Weather protection housing	Feed ø 40 mm
-----------------	----------------------------	--------------

LOCAL OSCILLATOR	Outputs : 4
Low band : 9,75 GHz	Impedance : 75 Ω
High band : 10,6 GHz	Amplification : 55 ... 67 dB
Accuracy : ± 1 MHz	Connector type : F female
Temperature drift : ± 1 MHz	Feed reception : 40 mm
Phase noise : -80 @10kHz	
LNB CONTROL	
Vertical : 10,5 ... 14 V	
Horizontal : 16 ... 19,5 V	
Band switch : 22 kHz	
AMBIENT OPERATING CONDITIONS	
Ambient temperature : -40 ... 70 °C	
Humidity : 10 ... 95 %	
INPUT FREQUENCY RANGE	
Low band : 10,7 ... 11,7 GHz	
High band : 11,7 ... 12,75 GHz	
NOISE FACTOR	
Noise figure : typ. 0,9 dB	
OUTPUT FREQUENCY RANGE	
Low band : 950 ... 1.950 MHz	
High band : 1.100 ... 2.150 MHz	
POWER SUPPLY	
LNB voltage supply : 10,5 ... 19,5 V	
Power consumption : max. 150 mA	
TECHNICAL DATA	